




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name:Trimethylolpropane

CAS:77-99-6

Molecular Weight:134.17

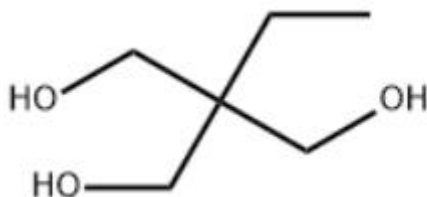

Item	Specification
Boiling point	159-161 °C2 mm Hg(lit.)
Density	1.176
Melting point	56-58 °C(lit.)
flash point	172 °C
resistivity	1.4850 (estimate)
pKa	14.01±0.10(Predicted)

Application:

Trimethylolpropane is widely used in the production of polyester and polyurethane foam plastics, as well as in the manufacture of alkyd coatings, synthetic lubricants, plasticizers, surfactants, rosin esters and explosives. It is also directly used as a textile additive and thermal stabilizer for PVC resin. When applied in alkyd resin, it can improve the resin's strength, color tone, weather resistance, chemical resistance, and sealing performance.

Package:

Usually packed in 25kg/drum,and also can be do customized package.