




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: 4-Acryloylmorpholine

CAS: 5117-12-4

Molecular weight: 141.17

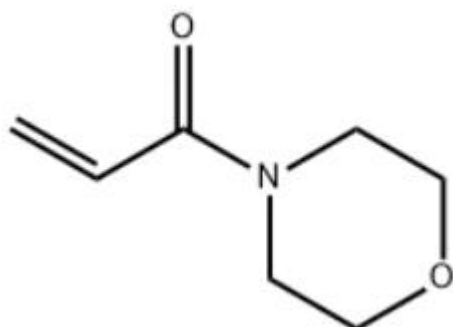

Item	Standard
Melting point	-35 °C(lit.)
Boiling point	158°C 50mm
Density	1.122 g/mL at 25 °C(lit.)
Vapor pressure	1.03-1.64Pa at 25-29.9°C
Refractive index	n ₂₀ /D 1.512(lit.)
Flash point	>230 °F
LogP	-0.46 at 20.5-21 °C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

N-acrylyl morpholine belongs to acrylamide active diluent, which can be used as diluent and modifier of UV-cured resin. It is widely used in the polymer resin industry, which has little irritation to the skin and low odor, and is widely used in various fields such as chemical industry, medicine and biology. In the aspect of UV photocuring, N-acrylomorpholine has fast curing speed, good dilution, low volume shrinkage, excellent heat resistance, and belongs to the active diluent with high performance and low toxicity, which has a good application prospect.

Package:

200kg/drum or according to customer requirements.

Unilong Industry