




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Antioxidant 1024

CAS: 32687-78-8

Molecular weight: 552.79

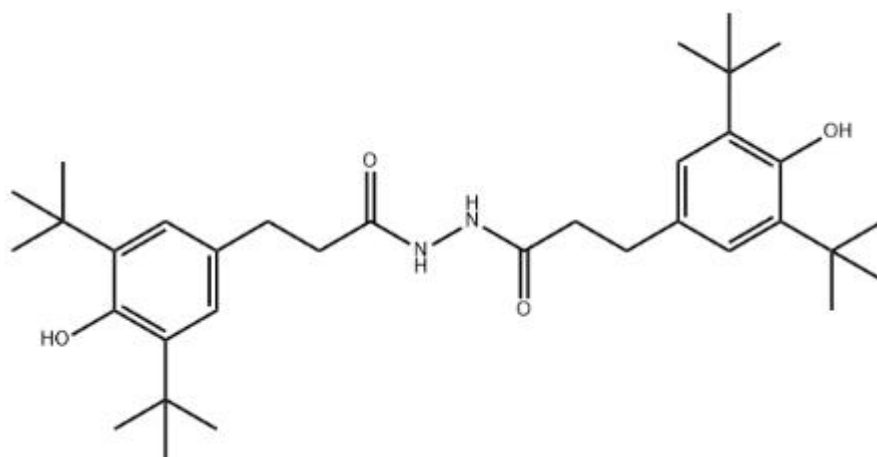

Item	Standard
Melting point	60-67°C
Boiling point	652.6±55.0 °C(Predicted)
Density	1.054±0.06 g/cm ³ (Predicted)
Acidity coefficient (pKa)	11.10±0.50(Predicted)
LogP	4.8 at 23°C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Antioxidant 1024 can be used alone or with other antioxidants, has a good synergistic effect. Suitable for polypropylene, polyethylene and other resins. It is mainly used in the processing and use of polyolefin insulated wires and cables. Antioxidant 1024 acts as an effective extraction stabilizer in finished colloids (synthetic or natural rubber latex pellets), especially in hoses of NBR fuel and gasoline.

Package:

25kg/drum or according to customer requirements.

Unilong Industry