




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Antioxidant 245

CAS: 36443-68-2

Molecular weight: 586.77

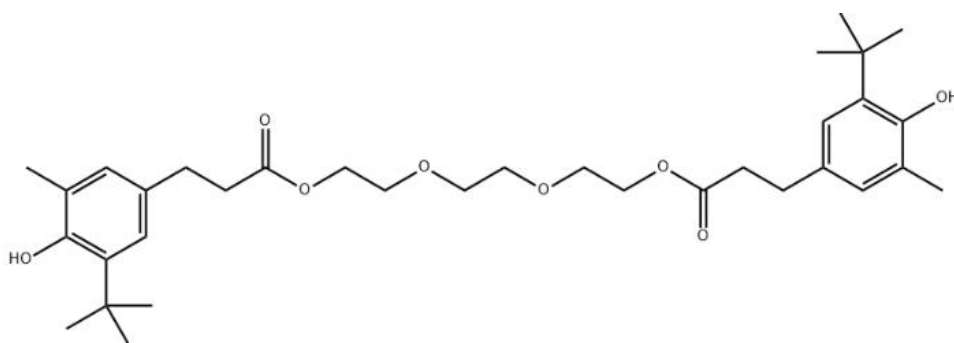

Item	Standard
Melting point	79-81 °C
Boiling point	602.88 °C (rough estimate)
Density	1.0397 (rough estimate)
Acidity coefficient (pKa)	11.44±0.25(Predicted)
Refractive index	1.6000 (estimate)
Flash point	>150 °C
LogP	4.7 at 23 °C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Antioxidant 245 has good compatibility with polymers and high thermal oxygen resistance. It is suitable for high impact polystyrene, ABS resin, AS resin, MBS resin, polyvinyl chloride, polyformaldehyde, polyamide, polyurethane, hydroxylated styrene butadiene rubber and styrene butadiene latex. It is also a chain terminator in PVC polymerization. In the field of polyurethane materials, it can be used in RIM, TPU, spandex, polyurethane adhesive, sealant and other products. It can be combined with auxiliary stabilizer, light stabilizer and its functional stabilizer.

Package:

25kg/drum or according to customer requirements.

Unilong Industry