




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: Diallyl bisphenol A**

**CAS: 1745-89-7**

**Molecular weight: 308.41**

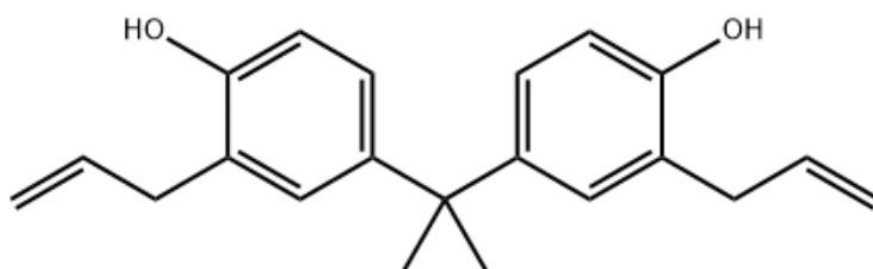

Item	Standard
Melting point	445.2±40.0 °C
Density	1.08 g/mL at 25 °C
Vapor pressure	0Pa at 20°C
Refractive index	n <sub>20</sub> /D 1.587(lit.)
Flash point	>230 °F
LogP	4.12 at 20°C
Acidity coefficient (pKa)	10.53±0.10



# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

---

## **Application:**

Diallyl bisphenol A can be used in electrical insulation materials, copper coated circuit boards, high temperature impregnated paint, insulating paint laminates, moulded plastics, etc. Diallyl bisphenol A can be used in wear-resistant materials, diamond grinding wheels, heavy duty grinding wheels, brake pads, high temperature bearing adhesives, etc. Diallyl bisphenol A can be used as an antioxidant in aerospace structural materials and rubber.

## **Package:**

200kg/drum or according to customer requirements.

Unilong Industry