




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: Esmolol Impurity 47**

**CAS: 5026-74-4**

**Molecular weight: 277.32**

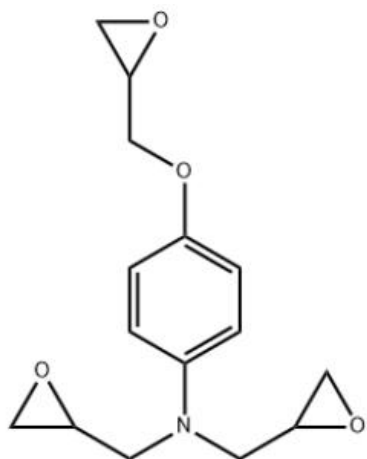

Item	Standard
Boiling point	420.18°C
Density	1.22 g/mL at 25 °C
Vapor pressure	0Pa at 25°C
Refractive index	n <sub>20</sub> /D 1.567(lit.)
Flash point	>230 °F
LogP	0.871
Acidity coefficient (pKa)	4.78±0.50



# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

---

## **Application:**

Now Esmolol Impurity 47 is mainly used in embedment pouring, high temperature resistant adhesive, carbon fiber, and glass fiber, especially in the fields of pultrusion composite products.

## **Package:**

200kg/drum or according to customer requirements.

Unilong Industry