




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: HALS 292

CAS: 41556-26-7

Molecular weight: 508.78

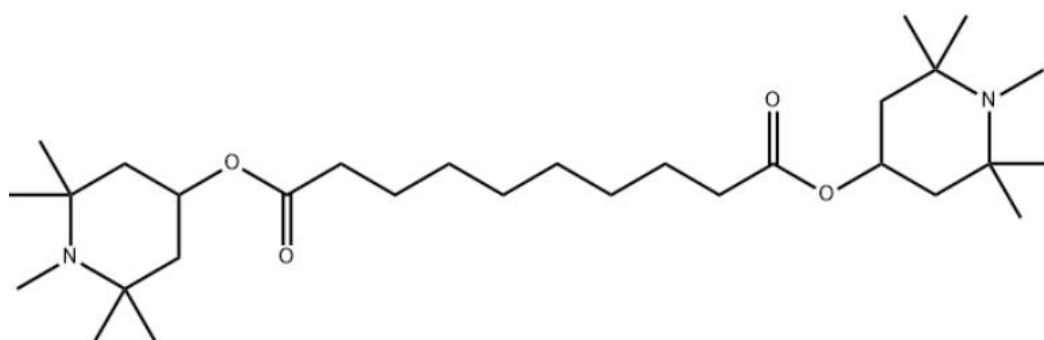

Item	Standard
Melting point	20°C
Boiling point	220°C (26.7 Pa)
Density	0.9925
Refractive index	1.4810-1.4850
Acidity coefficient (pKa)	9.80±0.10(Predicted)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Light stabilizer 292 is used in industrial coatings, automotive coatings, coil coatings, color coatings and mixed coatings for wood, radiation curable coatings and inks, including latex paints, alkyd paints, oil paints, one or two component polyurethanes, one and two component epoxies, transparent paints, thermosetting and thermoplastic acrylates, radiation curable acrylates, polyester, phenolic, ethyl, etc.

Package:

25kg/drum or according to customer requirements.

Unilong Industry