




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: HALS HS-508 (292)

CAS: 82919-37-7

Molecular weight: 369.54

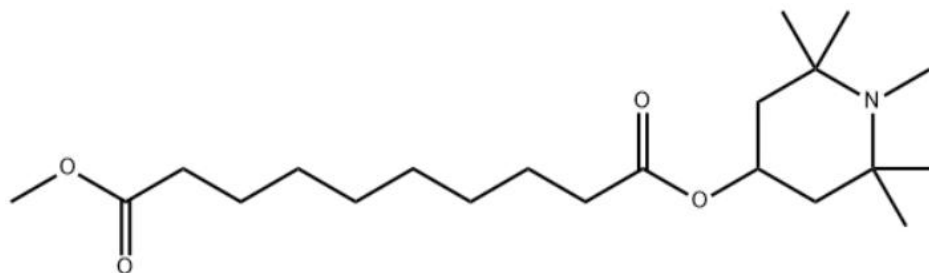

| Item | Standard |
|---------------------------|--|
| Boiling point | 387.1±32.0 °C(Predicted) |
| Density | 1.00±0.1 g/cm ³ (Predicted) |
| Acidity coefficient (pKa) | 9.50±0.10(Predicted) |

Application:

HALS HS-508 (292) is mainly used in paints, coatings, inks, polyurethane paints. HALS HS-508 (292) effectively prevents the coating from remaining shiny under sun exposure. Avoid cracking, blotching, bursting and surface stripping, thereby greatly increasing the coating life. HALS HS-508 (292) has a synergistic effect with UV absorbers.

Package:

200kg/drum or according to customer requirements.