




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Light Stabilizer 770

CAS: 52829-07-9

Molecular weight: 480.72

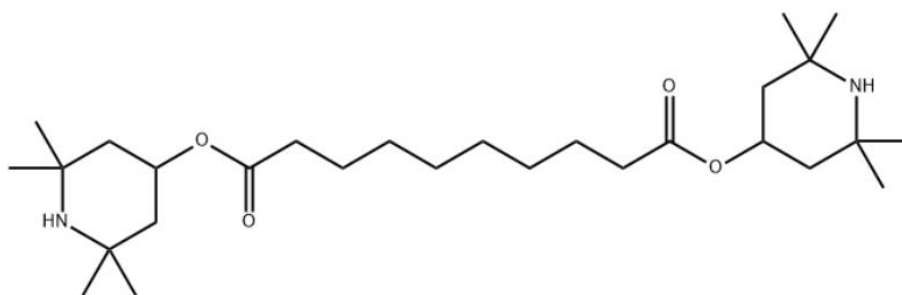

Item	Standard
Melting point	82-85 °C(lit.)
Boiling point	499.8±45.0 °C(Predicted)
Density	1.01±0.1 g/cm3(Predicted)
Vapor pressure	0Pa at 20°C
Flash point	421 °F
LogP	0.35 at 25 °C
Acidity coefficient (pKa)	10.49±0.10(Predicted)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Light stabilizer 770 is suitable for polypropylene, high-density polyethylene, polyurethane, polystyrene, ABS resin, etc., 770 light stabilization effect is better than the current common light stabilizer. When used with antioxidants, it can improve heat resistance, and when used with ultraviolet absorbers, it also has a synergistic effect, which can further improve the light stabilization effect.

Package:

25kg/drum or according to customer requirements.

Unilong Industry