




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Lowinox 44S36

CAS: 96-69-5

Molecular weight: 358.54

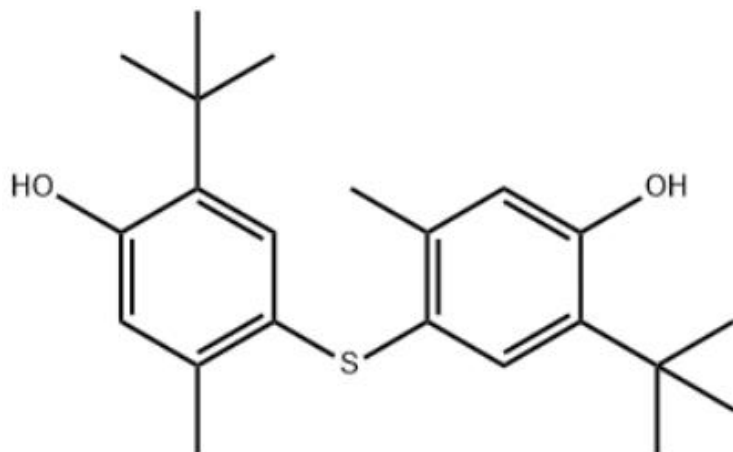

Item	Standard
Melting point	160-165 °C
Boiling point	460.94°C (rough estimate)
Density	1.06~1.12g/cm ³
Vapor pressure	0.001Pa at 20°C
Refractive index	1.5200 (estimate)
Flash point	215 °C
LogP	5.24 at 25 °C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Antioxidant 300, as an antioxidant, is suitable for polyolefin, polyester, polystyrene, ABS resin and polyvinyl chloride. It is also suitable for white, brilliant or transparent products. Antioxidant 300 is an efficient main antioxidant for rubber, polyolefin, plastic and other products, especially as an antioxidant for polyethylene cable and wire materials.

Package:

25kg/drum or according to customer requirements.

Unilong Industry