




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: N,N-Dimethyloctylamine

CAS: 7378-99-6

Molecular weight: 157.3

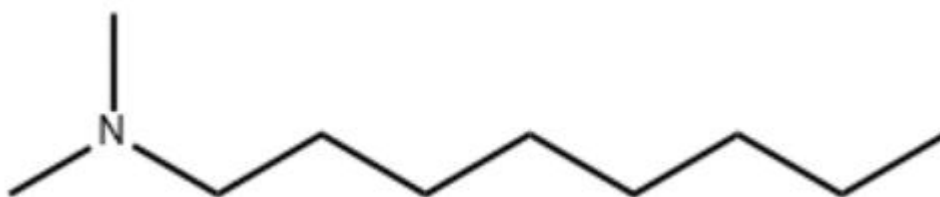

Item	Standard
Melting point	-57 °C (lit.)
Boiling point	195 °C (lit.)
Density	0.765 g/mL at 25 °C (lit.)
Vapor pressure	0.8 mm Hg (25 °C)
Refractive index	n ₂₀ /D 1.424(lit.)
Flash point	149 °F
LogP	2.17 at 21 °C
Acidity coefficient (pKa)	9.86±0.28



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

N, n-Dimethyloctylamine combined with an alkyl sulfonate is used as a modifier. N, n-dimethyloctylamine is used to separate amines and ammonium compounds. N, n-dimethyloctylamine can be used to produce surfactants such as fungicides.

Package:

200kg/drum or according to customer requirements.

Unilong Industry