




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Octabenzone

CAS: 1843-05-6

Molecular weight: 326.43

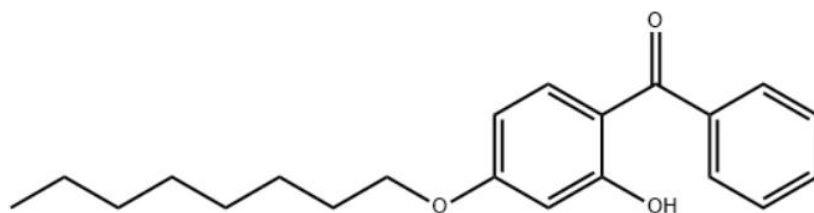

Item	Standard
Melting point	47-49 °C(lit.)
Boiling point	424.46°C (rough estimate)
Density	1.160g/cm ³
Acidity coefficient (pKa)	7.59±0.35(Predicted)
Refractive index	1.6000 (estimate)
Flash point	102 °C
LogP	7.360 (est)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

UV absorber UV-531 is widely used in PE, PVC, PP, PS, PC, polycarbonate, plexiglass, polypropylene fiber and vinyl acetate. And for dry phenolic and alkyd varnishes, polyurethanes, acrylics, epoxies and other air drying products and automotive finishing paints, powder coatings, rubber and other products, to provide them with a good light stabilization effect. Dosage 0.1-0.5%.

Package:

25kg/drum or according to customer requirements.

Unilong Industry