




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Sebacic acid

CAS: 111-20-6

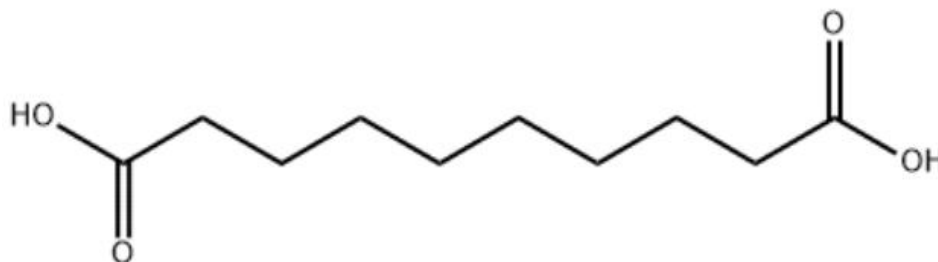

Item	Standard
Melting point	133-137 °C (lit.)
Boiling point	294.5 °C/100 mmHg (lit.)
Density	1.21
Vapor pressure	1 mm Hg (183 °C)
Refractive index	1.422
Flash point	220 °C
LogP	1.5 at 23°C
Acidity coefficient (pKa)	4.59, 5.59(at 25°C)



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Sebacic acid is used as a tailing reducer for gas chromatography to separate and analyze fatty acids. Sebacic acid can also be used to precipitate and quantify thorium, and to separate thorium from cerium and other rare earth elements. Sebacic acid is used as a plasticizer, synthetic resin and synthetic fiber.

Package:

25kg/drum or according to customer requirements.

Unilong Industry