



# Unilong Industry Co., Ltd


Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

---

**Product name: TH-CPL**

**CAS: 68610-51-5**

**Molecular weight: 296.45**

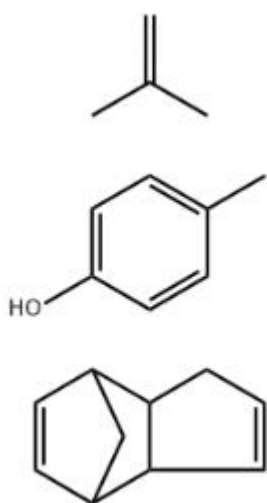

Item	Standard
Melting point	105°C
Boiling point	320°C[at 101 325 Pa]
Density	1.1 g/mL at 25 °C(lit.)
Vapor pressure	0Pa at 25°C
LogP	7.93 at 25°C



# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

---

## **Application:**

TH-CPL mainly used to protect light color, colorless compounds, such as: natural rubber and latex, ABS, BR, NBR, NR, SBR and carboxylated SBR rubber, SBS, SIS, and so on derived.

## **Package:**

25kg/drum or according to customer requirements.

Unilong Industry