




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Tributyl borate

CAS: 688-74-4

Molecular weight: 230.16

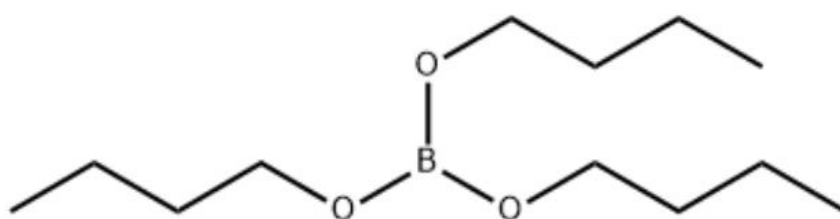

Item	Standard
Melting point	-70 °C (lit.)
Boiling point	114-115 °C/12 mmHg (lit.) 230-235 °C (lit.)
Density	0.853 g/mL at 25 °C (lit.)
Vapor pressure	3.79hPa at 25°C
Refractive index	n ₂₀ /D 1.409(lit.)
Flash point	200 °F
LogP	1 at 25°C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Tributyl borate is an intermediate for the preparation of boron hydrogen compounds and can be used in the synthesis of semiconductor boron diffusion sources, fire retardant adhesives and desiccant for anhydrous systems. Tributyl borate can be used as a polymer additive, gasoline additive, sterilizer, flame retardant, automotive brake fluid and specialty surfactant for a wide range of applications.

Package:

200kg/drum or according to customer requirements.

Unilong Industry