




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: UVR-6128

CAS: 3130-19-6

Molecular weight: 366.45

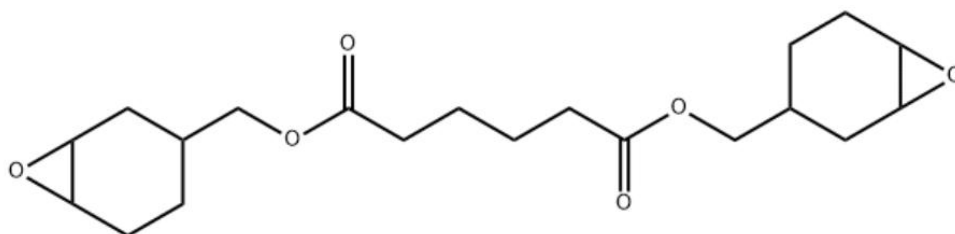

Item	Standard
Boiling point	457.21°C
Density	1.149 g/mL at 25 °C
Vapor pressure	0Pa at 25°C
Refractive index	n ₂₀ /D 1.493(lit.)
Flash point	>230 °F
LogP	2.98 at 20°C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

UVR-6128 can be used as an intermediate of epoxy resin and a coating of food packaging materials. The UVR-6128 can also be used in light modeling, making medical models, electronic material intermediates, automotive primers, and high-voltage cables.

Package:

200kg/drum or according to customer requirements.

Unilong Industry