




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Decaglycerol

CAS: 9041-07-0

Molecular weight: 758.799

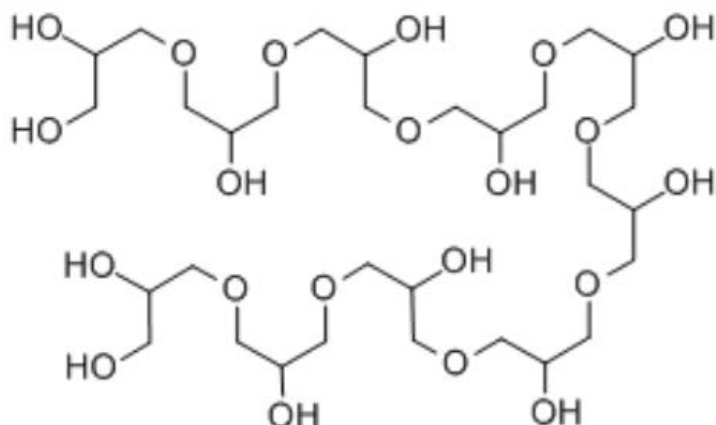

Item	Standard
Boiling point	943.4°C at 760mmHg
Density	1.367g/cm ³
Refractive index	1.542

Application:

Decaglycerin is used as a cosmetic raw material (using its moisturizing and moisturizing properties). Decaglycerin can be used as polyamide plasticizer, hydroxypropyl cellulose plasticizer and polyurethane plasticizer in plastics industry. The propylene oxide admixture of polyglycerin can be used as oil defoamer, the raw material of ethyl carbamate (polyurethane), the slurry agent and the development



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

accelerator for diazo copy paper, and the fixed liquid for gas chromatography analysis. It can also be used as a formaldehyde stabilizer, and the fixed liquid for gas chromatography analysis. It can be added to chemical electroplating solution to improve the plating quality, and can be added to cement to prevent cracking and shorten the curing time. Cement additive polyglycerin can be used as the main body to prepare cement composite grinding aid to increase production and reduce energy consumption. It can also be used as one of the multi-functional composite concrete slag admixture components, so that the concrete is dense and has anti-freezing and thawing damage performance. Other components can also be used in latex paint, ballpoint pen ink, oral health products, etc.

Package:

180kg/drum or according to customer requirements.

Unilong Industry