




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Diisobutylthiuram disulfide

CAS: 3064-73-1

Molecular weight: 408.75

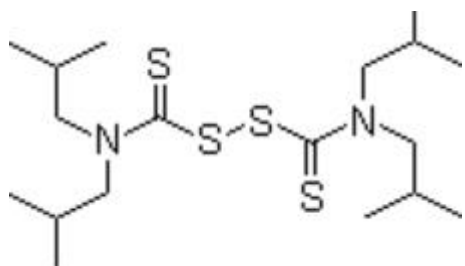

Item	Standard
Melting point	73.5-74.5 °C
Boiling point	462.9±28.0 °C
Density	1.076±0.06 g/cm ³
Vapor pressure	0Pa at 20°C
LogP	7.3
Acidity coefficient (pKa)	0.90±0.50

Application:

Diisobutylthiuram disulfide is an effective curing agent for acrylonitrile-butadiene rubber (NBR), suitable only in the case of ZnO and stearic acid as curing activators.



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Moreover, it is derived from diisobutylamine, which is a reagent used in organic synthesis, including the preparation of bx7 inhibitors that may be used to treat some cancers.

Package:

25kg/drum or according to customer requirements.

Unilong Industry