




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Dimethyl Glutarate

CAS: 1119-40-0

Molecular weight: 160.17

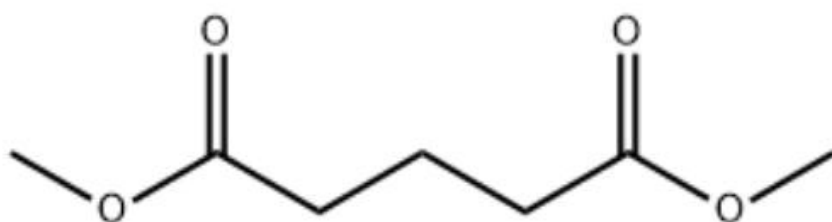

Item	Standard
Melting point	-13 °C
Boiling point	96-103 °C15 mm Hg
Density	1.09 g/mL at 25 °C
Vapor pressure	0.2 mm Hg (20 °C)
Refractive index	n ₂₀ /D 1.424(lit.)
Flash point	218 °F
LogP	0.49 at 20 °C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Dimethyl glutarate is widely used in automobile coating, color steel coating, can coating, enameled wire and home appliance coating. Dimethyl glutarate is an important intermediate of fine chemicals, which is used in the preparation of polyester resins, adhesives, synthetic fibers, film materials, etc.

Package:

200kg/drum or according to customer requirements.

Unilong Industry