




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Hydroxypropyl acrylate

CAS: 25584-83-2

Molecular Weight: 130.14

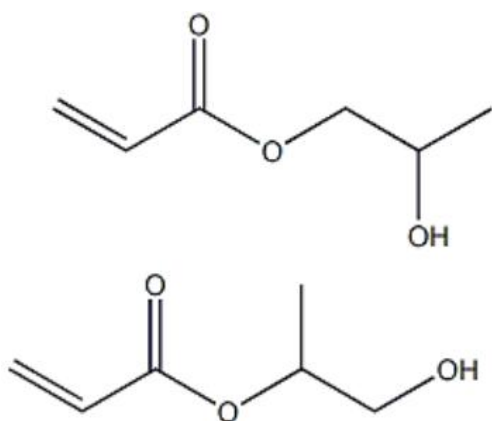

Item	Standard
Melting point	-92°C
Boiling point	77 °C5 mm Hg
Density	1.044 g/mL at 25 °C
Vapor pressure	1Pa at 20°C
Refractive index	n ₂₀ /D 1.445
Flash point	193 °F
LogP	0.2 at 25°C



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

Hydroxypropyl acrylate can be used to produce adhesives, thermosetting coatings, fiber treatment agents and modifiers of synthetic resin copolymers, and can also be used to prepare lubricating oil additives. Hydroxypropyl acrylate as a functional monomer is used as a crosslinked monomer of acrylic resin, which can improve the adhesion, weather resistance, agent resistance, impact resistance and gloss of the product. Used in the manufacture of synthetic resins, adhesives, thermosetting coatings and so on. It is also used in the manufacture of fiber treatment agents, latex, printing ink, medical materials, etc.

Package:

180kg/drum or according to customer requirements.

Unilong Industry