




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: LDAO

CAS: 1643-20-5

Molecular Weight: 229.4

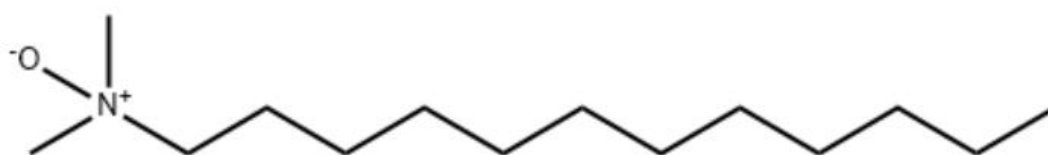

Item	Standard
Melting point	132-133 °C
Boiling point	371.32°C
Density	0.996 g/mL at 20 °C
Vapor pressure	0Pa at 25 °C
Refractive index	n ₂₀ /D 1.378
Flash point	113°C (closed cup)(235
LogP	1.85 at 20 °C
Acidity coefficient (pKa)	4.79±0.40



Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Application:

LDAO is mainly used in tableware detergents and industrial liquid bleach, which has the effect of foaming stabilization, and can improve the compatibility of thickener and the overall stability of the product. LDAO is used as a foam accelerator, conditioner, thickener and antistatic agent in shams, liquid detergents and foam baths, and as a raw material for the synthesis of amphoteric surfactants

Package:

Usually packed in 25kg/drum or 200kg/drum, and also can be do customized package.

Unilong Industry