




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name:Fumaric acid

CAS: 110-17-8

Molecular Weight: 116.07

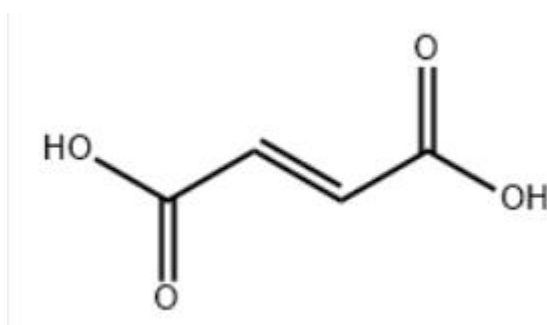

| Item | Specification |
|--------------------|---------------------------|
| Boiling point | 137.07°C (rough estimate) |
| Density | 1.62 |
| Melting point | 298-300 °C (subl.) (lit.) |
| flash point | 230 °C |
| resistivity | 1.5260 (estimate) |
| Storage conditions | Store below +30°C. |

Application:

Fumaric acid is used to produce unsaturated polyester resin, which is characterized by good chemical corrosion resistance and heat resistance; The copolymer of fumaric acid and vinyl acetate is a good adhesive, and the copolymer of styrene is a raw material for manufacturing fiberglass. The plasticizer made from fumaric acid is non-toxic and can be used for vinyl acetate latex in contact with food.

Package:

Usually packed in 25kg/drum,and also can be do customized package.