




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: 2,2,6,6-Tetramethyl-4-piperidiny l stearate

CAS: 167078-06-0

Molecular Weight: 423.72

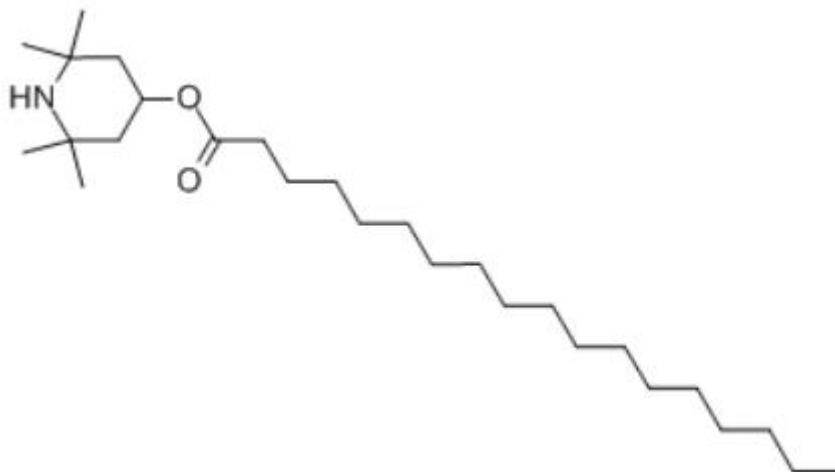

Item	Specification
Boiling point	483.1 ± 38.0 ° C at 760 mmHg
Density	0.9 ± 0.1 g/cm ³
Melting point	28-32° C
flash point	246.0 ± 26.8 ° C
MW	423.72
MF	C ₂₇ H ₅₃ N ₁ O ₂

Application:

2,2,6,6-Tetramethyl-4-piperidiny l steel is used for polyolefin plastics, polyurethane, ABS resins, and 2,2,6,6-Tetramethyl-4-piperidiny l steel is also used for coatings, adhesives, rubber, etc

Package:

Usually packed in 25kg/drum, and also can be do customized package.