




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: Dioctyl terephthalate**

**CAS: 6422-86-2**

**Molecular Weight: 390.56**

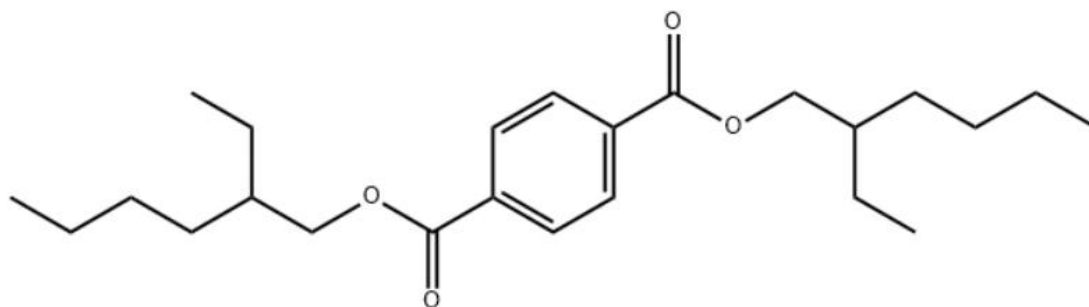

Item	Specification
Boiling point	400 °C (lit.)
Density	0.986 g/mL at 25 °C (lit.)
Melting point	-48 °C
flash point	230 °F
resistivity	n20/D 1.49(lit.)
Storage conditions	2-8°C

## Application:

Dioctyl terephthalate is not only widely used as a plasticizer in cable materials and PVC, but also in the production of synthetic leather films. In addition, DOTP has excellent compatibility and can also be used as a plasticizer for acrylonitrile derivatives, polyvinyl butyral, nitrile rubber, nitrocellulose, etc

## Package:

Usually packed in 25kg/drum, and also can be do customized package.