




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name: Octadecanamide**

**CAS: 124-26-5**

**Molecular Weight: 283.49**

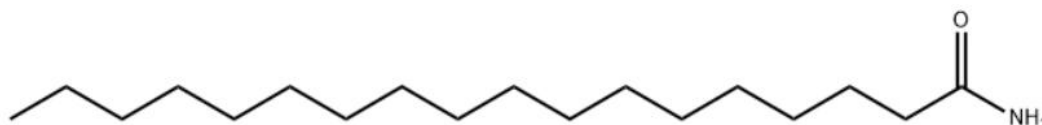

Item	Specification
Boiling point	250-251 ° C/2 mm Hg(lit.)
Density	0.9271 (rough estimate)
Melting point	98-102 ° C(lit.)
Vapor pressure	0Pa at 25°C
resistivity	1.432-1.434
Storage conditions	Refrigerator

## Application:

Octadecanamide is mainly used in inks, coatings, leather coatings, etc. to improve smoothness, wear resistance, and anti adhesion performance; It can also be used as a textile post-treatment additive, paper coating, thermal paper sensitizer, etc. Compared with commonly used inorganic anti adhesive agents (silica), Octadecanamide has the characteristic of not affecting the transparency of products. As an internal release agent and lubricant for synthetic rubber or natural rubber, Octadecanamide improves the processing of rubber materials and endows products with good gloss.

## Package:

Usually packed in 25kg/drum, and also can be do customized package.