




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name: Poly(tetrafluoroethylene)

CAS: 9002-84-0

Molecular Weight: 0

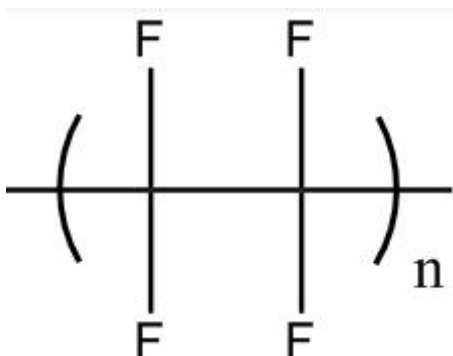

Item	Specification
Boiling point	400 °C
Density	2.15 g/mL at 25 °C
Melting point	327 °C
Odor	tasteless
resistivity	1.35
Storage conditions	Store at -20°C

Application:

PTFE has excellent high and low temperature performance and chemical stability, as well as good electrical insulation, non adhesion, weather resistance, non flammability, and good lubricity. It is widely used in various fields from aerospace to daily commodities, and has become an indispensable material for solving many key technical problems in modern science and technology, military and civilian applications.

Package:

Usually packed in 25kg/drum, and also can be do customized package.