




Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China
Contact: +86-18653132120

Product name:Ethoxylated Bisphenol A

CAS: 32492-61-8

Molecular Weight:0

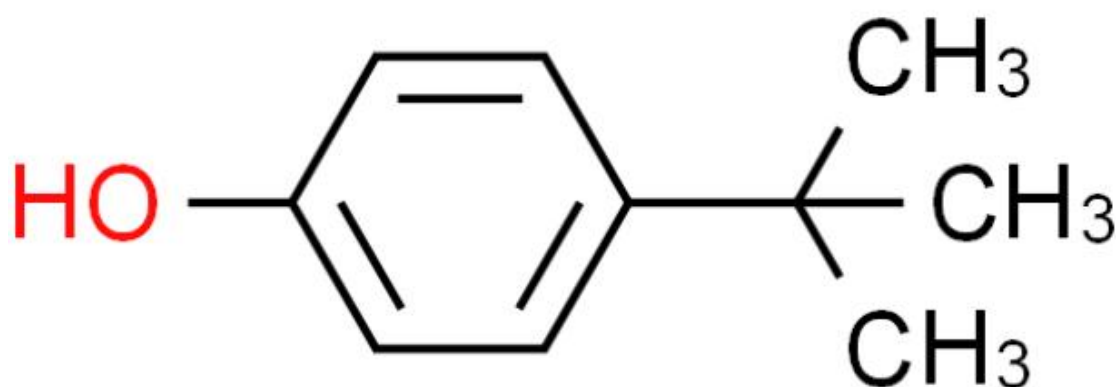

Item	Specification
Refractivity	n ₂₀ /D 1.552
Density	1.18 g/mL at 25 °C
EINECS	500-082-2
MW	0
Purity	99%
Boiling point	350°C[at 101 325 Pa]

Application:

Ethoxylated Bisphenol A is mainly used for cathodic electrophoretic paint, polyurethane series waterproof and special coatings, and polyurethane foam, which can improve the flexibility, corrosion resistance and adhesion between layers of cathodic electrophoretic paint

Package:

Usually packed in 25kg/drum,and also can be do customized package.