




# Unilong Industry Co., Ltd

Add: No.2000 Shunhua Rd, High-Tech Zone , Jinan City, Shandong Province, China  
Contact: +86-18653132120

**Product name:2,2,3,4,4,4-Hexafluorobutyl acrylate**

**CAS:54052-90-3**

**Molecular Weight:236.11**

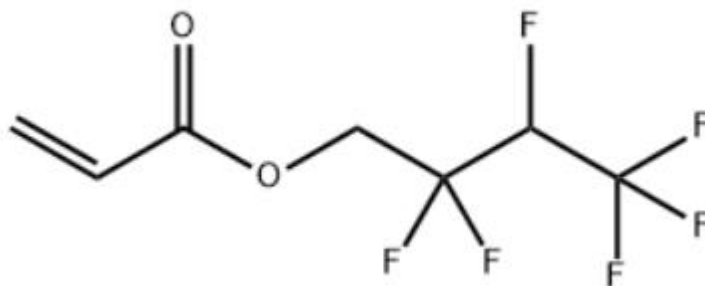

Item	Specification
Boiling point	40-43 °C/8 mmHg (lit.)
Density	1.389 g/mL at 25 °C (lit.)
flash point	140 °F
refractivity	n <sub>20</sub> /D 1.352(lit.)
Storage conditions	2-8°C

## Application:

2,2,3,4,4,4-Hexafluorobutyl acrylate can be used for the preparation of high-end fluorinated polymers. Can be used for the preparation of new building exterior wall coatings with high weather resistance, anti fouling, and self-cleaning functions. Hexafluorobutyl acrylate is also used in the preparation of leveling agents, defoamers, surfactants, etc. It can also be used as a raw material for optical resins, fabrics, leather processing, glass, paper, and wood product protection.

## Package:

Usually packed in 25kg/drum, and also can be do customized package.